



# USTM

Professional  
water treatment

## MultiLine Bypass za omekšivač vode

- Namjenjen za instalaciju omekšivača za vodu
- Štedi vrijeme kod montaže
- Zatvara dovod vode bez potrebe zatvaranja ventila za dovod vode u cijeloj kući
- Omogućava korištenje vode za vrijeme instalacije, servisa ili popravka uređaja




Najpouzdaniji i najizdržljiviji ventili ovog tipa na tržištu (PN25)



Intuitivno upravljanje protokom



Montaža vodoravno i horizontalno

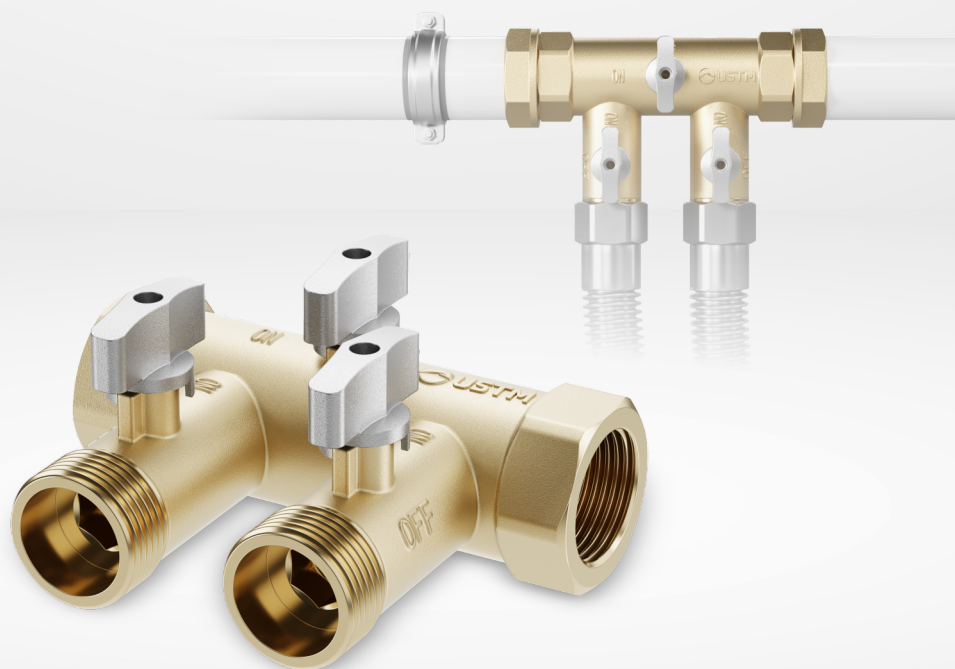



# USTM

Professional  
water treatment

## Tehnički podaci

Simbol	BYPASS MULTILINE
Promijer priključka	2 x 1" GW i 2 x 1" GZ
Nominalni tlak	PN 25
Radni tlak	6 bar
Maksimalna temperatura	40 °C
Namjena	Topla i hladna voda
Materijal	Mesing
Težina	1,2 kg

## Dimenzije

